


GATE VALVES		BALL VALVES		BALL VALVES JAMESBURY ARGUS 2" to 6"		JAMESBURY (GEAR OPERATED)		ARGUS (GEAR OPERATED)		GLOBE VALVES		CHECK VALVES SWING TYPE		DIAPHRAGM VALVES	
SOCKET WELD 800 lbs		FLANGED		SCREWED		FLANGED		SOCKET WELD 800 lbs		FLANGED		SCR AND SW		125 lbs	
NOH DIAM	A B C	150 lbs A B C	300 lbs A B C	600/1440 lbs A B C	150 lbs A B C	300 lbs A B C	150 / 300 lbs A B C	A B C	A B C	A B C	A B C	150 lbs A A A	300 lbs A A A	A B C	A B C
1/2"	82.5 154 80	108 200 140	208 115	92 83 156	108 91 121	46 140 111 102 46		92 108 102	108 152 166	92		102 70 57			
3/4"	89 165 89	118 225 152	266 150	98 86 156	117 91 121	51 152 114 102 51		110 226 122	117 217 178 178 127 110			118 70 70			
1"	105 197 120	127 250 165	310 150	108 94 156	127 103 165	51 165 127 214 51		127 250 148	127 217 203 204 127 127			127 89 83			
1 1/2"	146 264 146	165 315 190	350 150	121 103 203	165 125 212	67 190 133 214 67		171 326 200	165 322 229 266 175 171			159 146 115			
2"		178 420 216	525 205		178 130 212	71 216 138 214 71			203 350 267 470 205			203 267 191 175 140			
3"		203 530 283	630 255		203 163 533	106 283 167 533 83			241 420 318 535 230			241 318 254 232 197			
4"		229 650 305	770 305		229 194 533	122 305 194 533 102			289 500 356 635 255			292 356 305 280 254			
6"		267 900 403	990 405		267 278 737	143 403 279 737 127	437 300 578 215 260 240 500		406 620 445 785 305			356 446 406 372 368			
8"		292 1090 419	1230 460		292 302 737	159 419 146 437 326 578 225 295 318 500		495 660 559 920 405			495 533 521 514 483				
10"		330 1330 457	1430 500		330 175 457	181 437 390 578 225 353 500		623 780 623 995 700			622 622 635 603 585				
12"		356 1540 502	1620 610		356 178 470	181 437 390 578 225 353 500		699 840 711 1070 800			699 711 750 702 699				
14"		381 1780 562	1845 685				670 426 578 225 391 500		788 1050 800			782 800 750 914 699			
16"		406 2030 636	2050 685									914 914			
18"		432 2260 694	2220 760									914 914			
20"		457 2470 991	2385 910									1100 1100			
24"		508 2860 1143	2810 910									1219 1219			


OPMERKING: JUISTE MATEN VAN SPINDELLENGTE EN HANDWIELEN

AAN DE HAND VAN GEKOZEN TYPE AFSLUITER CONTROLEREN

IN DES BETREFFEN DE CATALOGUS




A	B	C
1/2"	338	499
3/4"	681	875
1"	1067	1372
1 1/2"	1470	1890
2"	2182	2806
3"	2863	3681
4"	4312	5544
6"	5740	7380
8"	7207	9266
10"	8596	11052
12"	9424	12116
14"	10446	13949
16"	12180	15660
18"	13513	17374
20"	16537	21262

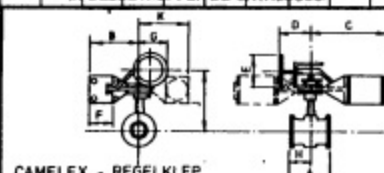

CAMFLEX - REGELEKLEP

A	B	C	D	E	F	G	H	J	K
1/2"	102	148	317	114	100	111	83	68	179
3/4"	114	145	317	114	100	111	84	62	208
1"	124	143	317	116	100	111	85	62	213
1 1/2"	165	228	487	155	160	154	127	97	289
2"	194	228	487	155	160	154	127	105	311
3"	229	279	558	206	220	194	178	127	370
4"	263	276	558	235	220	194	181	148	410
6"	273	273	558	235	220	194	200	157	505
8"	292	273	558	235	220	194	203	184	530
10"									
12"									
14"									
16"									
18"									
20"									
24"									

VOOR 8" EN GROTER 300 FLENZEN TOEPASSEN




REGELEKLEP

A	B	C	D	E	F
1/2"	191	675	265	584	89
3/4"	194	675	265	584	89
1"	197	684	265	610	95
1 1/2"	235	710	265	686	127
2"	267	940	368	711	127
3"	318	989	368	864	183
4"	368	991	368	889	181
6"	473	1157	470	889	279
8"	569	1180	470	1219	302
10"	708	1294	470	1575	419
12"					
14"					
16"					
18"					
20"					
24"					

* REGELEKLEPPEN LPG OPSLAG
VOLDUEN NIET AAN DEZE
MATEN. IN DEZE GEVALLEN
KONTAKT OPNEMEN MET TAI

F BIJ SPRING ACTION OPEN

D BIJ SPRING ACTION CLOSED



MECHANICA'S
DA 2301 (SSI) 1" x 20 x 1

A	B	C	D	E	F
1/2"	181	675	265	584	89
3/4"	194	675	265	584	89
1"	197	684	265	610	95
1 1/2"	235	710	265	686	127
2"	267	940	368	711	127
3"	318	989	368	864	183
4"	368	991	368	889	181
6"	473	1157	470	889	279
8"	569	1180	470	1219	302
10"	708	1294	470	1575	419
12"					
14"					
16"					
18"					
20"					
24"					

rev datum
3-8-83
76 1977 77

TAOK
CTAOK

A	B	Crosby	Consolidated
1 D 2	105	114	375
1 E 2	105	114	375
2 F 2	124	152	460
2 H 3	130	124	468
3 K 4	156	162	591
4 L 6	179	181	692
4 M 6	178	184	765
4 N 6	197	210	822
4 P 6	225	254	927
6 Q 8	240	241	991
6 R 10	240	267	1155
6 S 10	240	267	1092
8 T 10	276	280	1275

GEGEVENS: AFSLUITERS - VEILIGHEDEN
REGELEKLEPPEN EN MEETFLENZEN

rev datum	tek nr	R - 60035	C	TAOK
3-8-83	76 1977 77	STANDAARD	rev	CTAOK
		SNR BV		
		SNC BV		

