


2012

Flange, Spacer Plate and Spectacle Blind

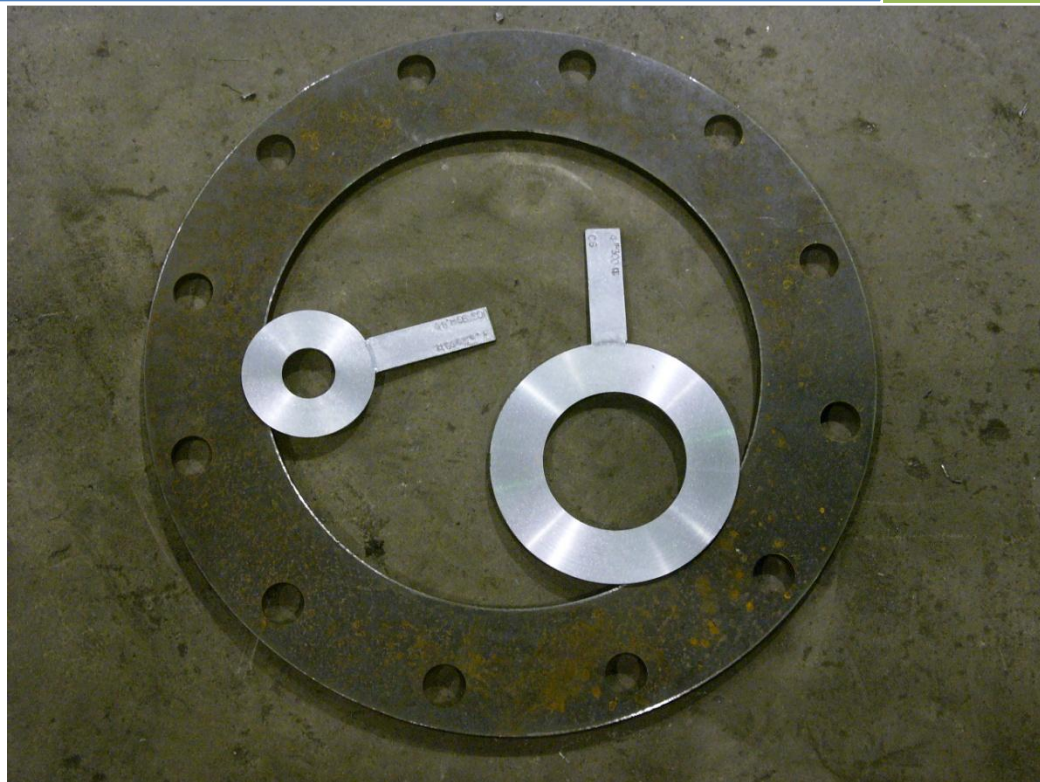

paulcscheung

LH Flex Flow Ltd.

1/1/2012


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

Plate Flange Blinds and Spacers

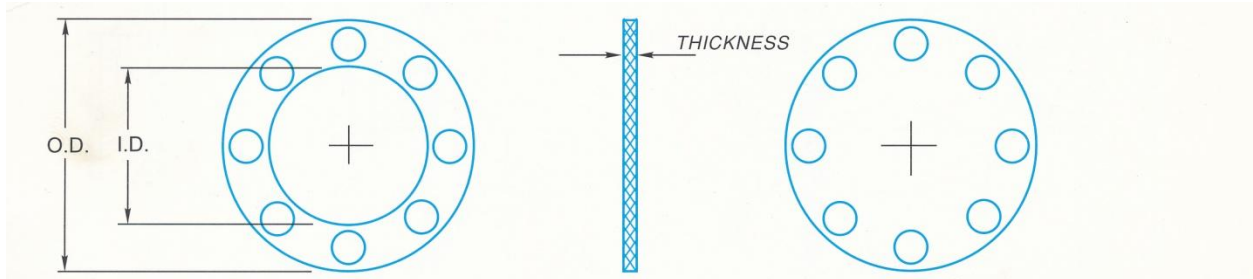

Pipe Size	150#		300#		400#		600#	
	O.D.	Thickness	O.D.	Thickness	O.D.	Thickness	O.D.	Thickness
½"	3-1/2"	½"	3-3/4"	½"	For size 3-1/2" and smaller use 600# Standard		3-3/4"	9/16"
¾"	3-7/8"	½"	4-5/8"	½"			4-5/8"	5/8"
1"	4-1/4"	½"	4-7/8"	½"			4-7/8"	11/16"
1-1/4"	4-5/8"	½"	5-1/4"	½"			5-1/4"	13/16"
1-1/2"	5"	½"	6-1/8"	½"			6-1/8"	7/8"
2"	6"	½"	6-1/2"	½"			6-1/2"	1"
2-1/2"	7"	½"	7-1/2"	½"			7-1/2"	1-1/8"
3"	7-1/2"	½"	8-1/4"	½"			8-1/4"	1-1/4"
3-1/2"	8-1/2"	½"	9"	½"			9"	1-3/8"
4"	9"	½"	10"	½"	10"	½"	10-3/4"	1-1/2"
5"	10"	½"	11"	½"	11"	½"	13"	1-3/4"
6"	11"	½"	12-1/2"	½"	12-1/2"	½"	14"	1-7/8"
8"	13-1/2"	½"	15"	½"	15"	½"	16-1/2"	2-3/16"
10"	16"	½"	17-1/2"	½"	17-1/2"	½"	20"	2-1/2"
12"	19"	½"	20-1/2"	½"	20-1/2"	½"	22"	2-5/8"
14"	21"	½"	23"	½"	23"	½"	23-3/4"	2-3/4"
16"	23-1/2"	½"	25-1/2"	½"	25-1/2"	½"	27"	3"
18"	25"	½"	28"	½"	28"	½"	29-1/4"	3-1/4"
20"	27-1/2"	½"	30-1/2"	½"	30-1/2"	½"	32"	3-1/2"
22"	29-1/2"	½"	33"	½"	33"	½"	34-1/4"	3-3/4"
24"	32"	½"	36"	½"	36"	½"	37"	4"
26"	34-1/4"	½"	38-1/4"	½"	38-1/4"	½"	40"	4-1/4"
30"	38-3/4"	½"	43"	½"	43"	½"	44-1/2"	4-1/2"
34"	43-3/4"	½"	47-1/2"	½"	47-1/2"	½"	49"	4-3/4"
36"	46"	½"	50"	½"	50"	½"	51-3/4"	4-7/8"
42"	53"	½"	57"	½"	57"	½"	58-3/4"	5-1/2"

Thicker material available on request


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

150# RF Flange Rating

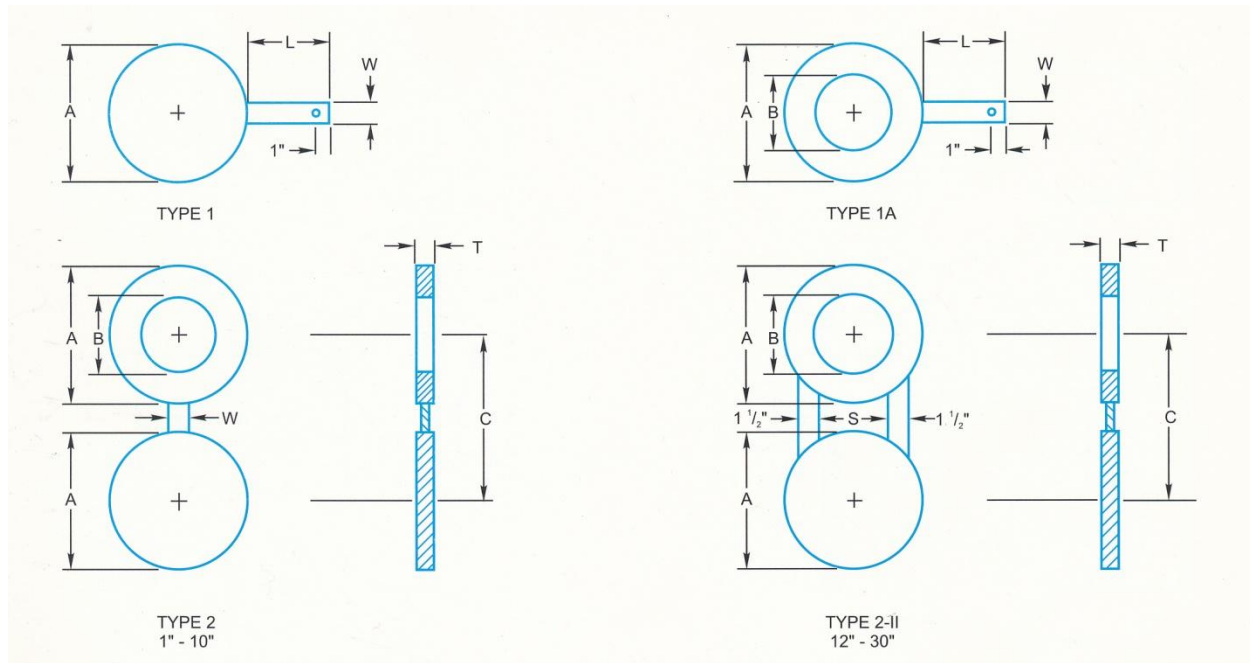

Size	Dimension in inches							Weight in lbs.		
	A	B	C	T	L	W	S	1	1A	2
1"	2-1/2"	1-1/8"	3-1/8"	1/4"	4"	1"	-	1	1	1
1-1/2"	3-1/4"	1-1/2"	3-7/8"	1/4"	4"	1"	-	1	1	1
2"	4"	2-1/8"	4-3/4"	1/4"	4"	1"	-	2	1	2
2-1/2"	4-3/4"	2-1/2"	5-1/2"	1/4"	4"	1"	-	2	2	3
3"	5-1/4"	3-1/8"	6"	1/4"	4"	1"	-	2	2	3
4"	6-3/4"	4-1/8"	7-1/2"	1/4"	4"	1"	-	3	2	5
6"	8-5/8"	6-1/8"	9-1/2"	3/8"	4"	1"	-	7	4	10
8"	10-7/8"	8"	11-3/4"	1/2"	4"	1"	-	14	7	20
10"	13-1/4"	10-1/8"	14-1/4"	5/8"	5"	1"	-	26	12	35
12"	16"	12"	17"	3/4"	5"	1-1/2"	-	45	21	62
14"	17-1/2"	13-1/4"	18-3/4"	3/4"	5"	1-1/2"	1-1/2"	63	24	74
16"	20"	15-1/4"	21-1/4"	1"	5"	1-1/2"	1-1/2"	92	40	127
18"	21-3/8"	17-1/4"	22-3/4"	1"	5"	1-1/2"	1-1/2"	105	39	139
20"	23-5/8"	19-1/4"	25"	1-1/8"	5"	1-1/2"	1-1/2"	145	50	188
24"	28"	23-1/4"	29-1/2"	1-3/8"	5"	1-1/2"	1-1/2"	245	80	315
30"	34-1/2"	29-1/4"	36"	1-5/8"	5"	1-1/2"	1-1/2"	437	128	555
36"	41"	35-1/4"	42-3/4"	2"	6"	1-1/2"	1-1/2"	757	203	945

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: M-Smooth, F-Machined, S-Serrated
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

300# RF Flange Rating

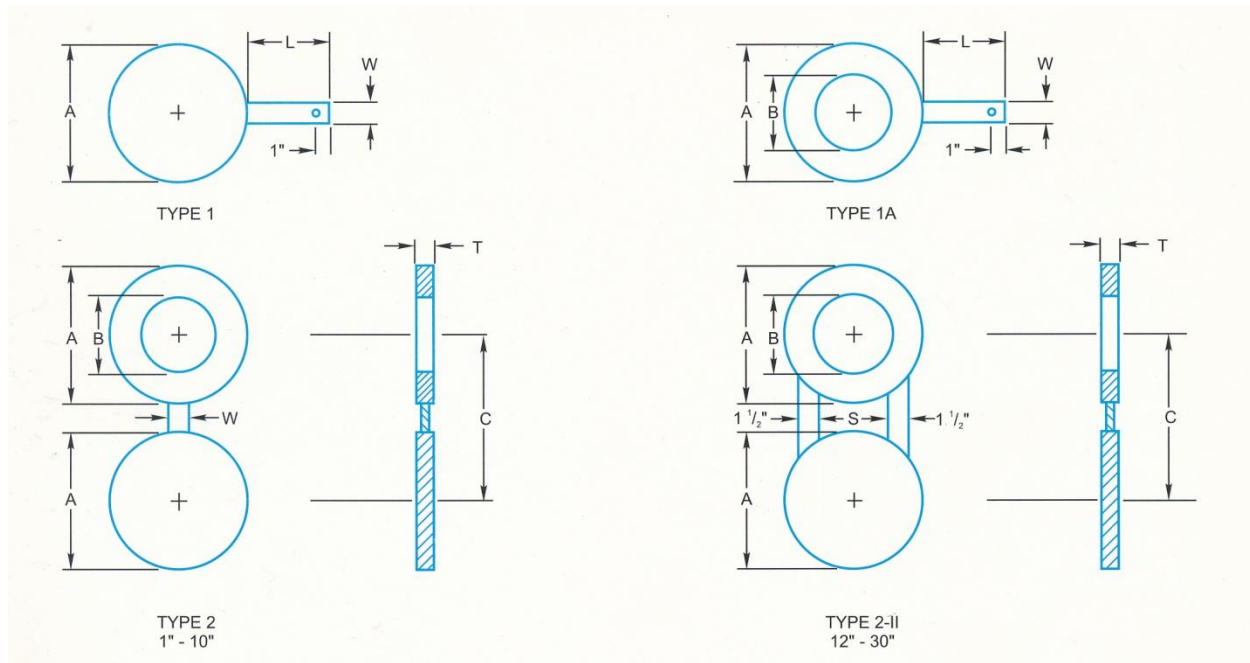

Size	Dimension in inches							Weight in lbs.		
	A	B	C	T	L	W	S	1	1A	2
1"	2-3/4"	1-1/8"	3-1/2"	1/4"	4"	1"	-	1	1	1
1-1/2"	3-5/8"	1-5/8"	4-1/2"	1/4"	4"	1"	-	1	1	2
2"	4-1/4"	2-1/8"	5"	1/4"	4"	1"	-	2	1	2
2-1/2"	5"	2-1/2"	5-7/8"	5/16"	4"	1"	-	3	2	4
3"	5-3/4"	3-1/8"	6-5/8"	5/16"	4"	1"	-	3	3	4
4"	7"	4-1/8"	7-7/8"	1/2"	4"	1"	-	7	5	10
6"	9-3/4"	6-1/8"	10-5/8"	5/8"	4"	1"	-	15	10	22
8"	12"	8"	13"	3/4"	4"	1"	-	26	15	38
10"	14-1/8"	10-1/8"	15-1/4"	1"	5"	1-1/2"	-	47	25	67
12"	16-1/2"	12"	17-3/4"	1-1/4"	5"	1-1/2"	1-1/2"	79	39	113
14"	18-7/8"	13-1/4"	20-1/4"	1-1/4"	5"	1-1/2"	1-1/2"	103	54	150
16"	21"	15-1/4"	22-1/2"	1-1/2"	5"	1-1/2"	1-1/2"	151	74	218
18"	23-1/4"	17-1/4"	24-3/4"	1-5/8"	5"	1-1/2"	1-1/2"	200	92	285
20"	25-1/2"	19-3/4"	27"	1-7/8"	6"	1-1/2"	1-1/2"	280	124	390
24"	30-1/4"	23-1/4"	32"	2-1/4"	6"	1-1/2"	1-3/4"	470	200	650
30"	37-1/4"	29-1/4"	39-1/4"	2-3/4"	6"	1-1/2"	2"	860	340	1190

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: M-Smooth, F-Machined, S-Serrated
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

600# RF Flange Rating

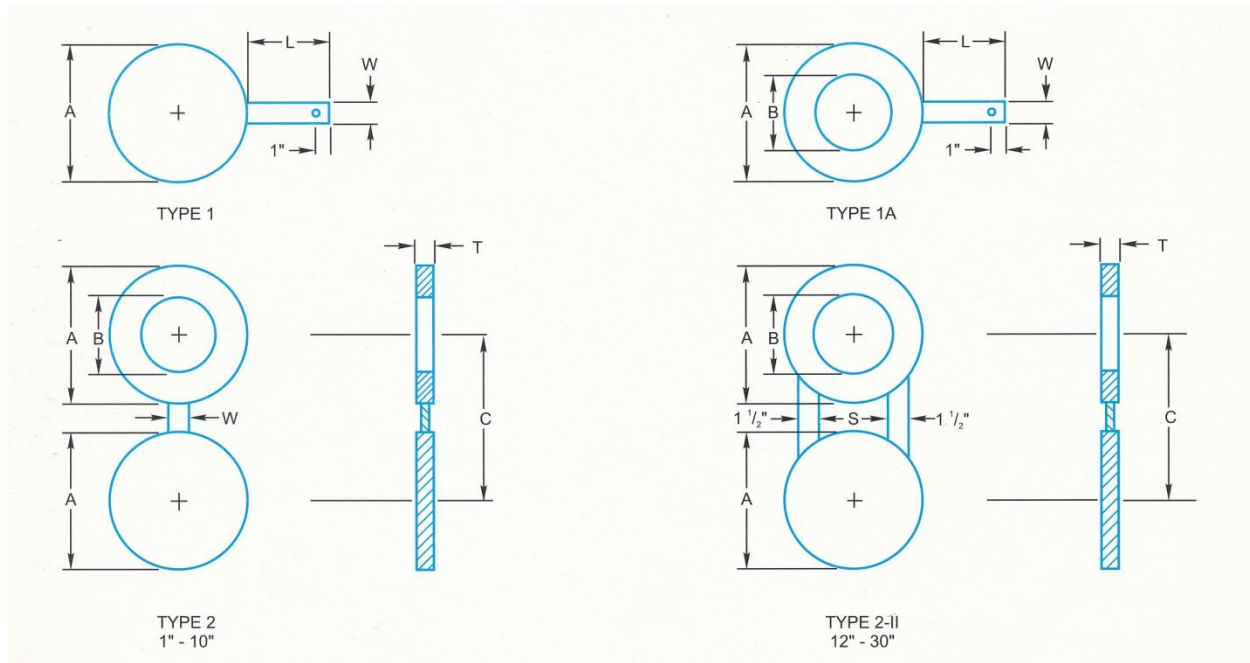

Size	Dimension in inches							Weight in lbs.		
	A	B	C	T	L	W	S	1	1A	2
1"	2-3/4"	1-1/8"	3-1/2"	1/4"	4"	1"	-	1	1	1
1-1/2"	3-3/8"	1-5/8"	4-1/2"	1/4"	4"	1"	-	1	1	2
2"	4-1/4"	2-1/8"	5"	5/16"	4"	1"	-	2	2	2
2-1/2"	5"	2-1/2"	5-7/8"	3/8"	4"	1"	-	3	2	4
3"	5-3/4"	3-1/8"	6-5/8"	1/2"	4"	1"	-	5	4	7
4"	7-1/2"	4-1/8"	8-1/2"	5/8"	4"	1"	-	9	7	14
6"	10-3/8"	5-3/4"	11-1/2"	7/8"	5"	1"	-	23	17	36
8"	12-1/2"	7-5/8"	13-3/4"	1-1/8"	5"	1"	-	42	27	65
10"	15-5/8"	9-3/4"	17"	1-1/2"	5"	1-1/2"	1-1/2"	85	53	132
12"	17-3/4"	11-1/2"	19-1/4"	1-3/4"	5"	1-1/2"	1-1/2"	127	73	193
14"	19-1/8"	12-3/4"	20-3/4"	1-3/4"	5"	1-1/2"	1-3/4"	147	79	218
16"	22"	14-1/2"	23-3/4"	2-1/8"	6"	1-1/2"	1-3/4"	237	140	365
18"	23-7/8"	16-3/8"	25-3/4"	2-3/8"	6"	1-1/2"	2	310	153	450
20"	26-5/8"	17-3/4"	28-1/2"	2-1/2"	6"	1-1/2"	2	405	235	625
24"	30-7/8"	21-1/4"	33"	3"	6'	1-1/2"	2-1/4"	645	335	970

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: M-Smooth, F-Machined, S-Serrated
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

900# RF Flange Rating

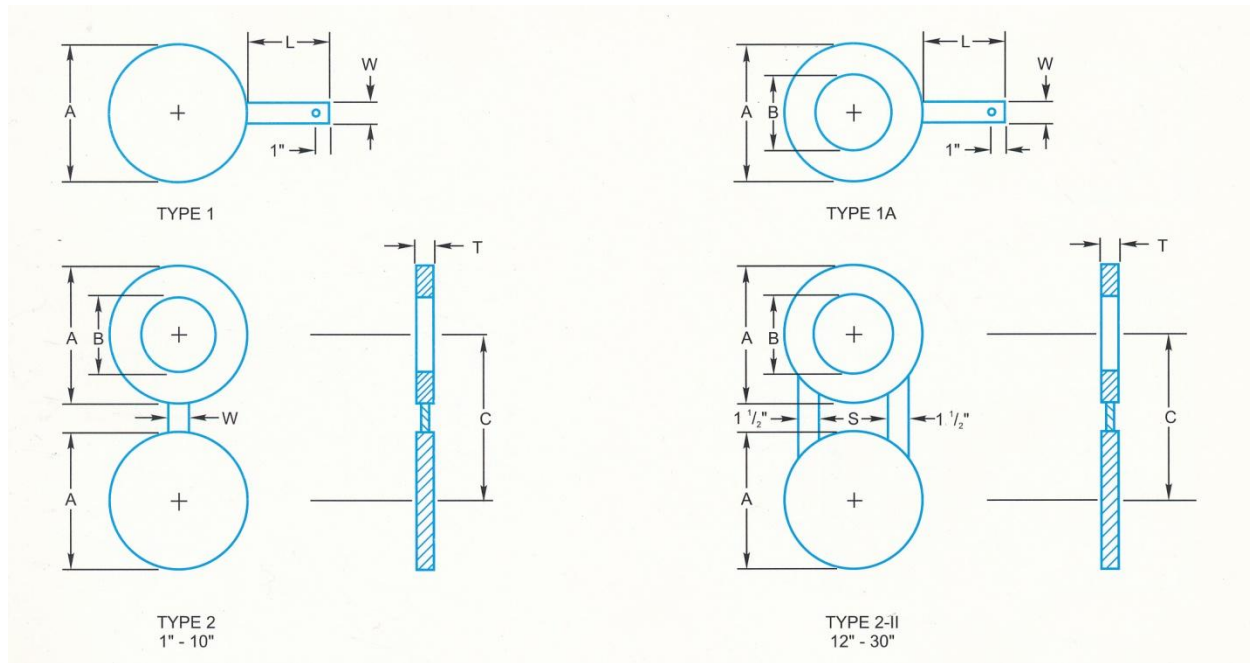

Size	Dimension in inches							Weight in Kg		
	A	B	C	T	L	W	S	1	1A	2
1"	3"	1"	4"	¼"	5"	1"	-	1	1	1
1-1/2"	3-3/4"	1-1/2"	4-7/8"	5/16"	5"	1"	-	2	2	2
2"	5-1/2"	1-15/16"	6-1/2"	3/8"	5"	1"	-	3	3	5
2-1/2"	6-3/8"	2-5/16"	7-1/2"	½"	5"	1"	-	6	5	9
3"	6-1/2"	2-15/16"	7-1/2"	5/8"	5"	1"	-	8	7	11
4"	8"	3-7/8"	9-1/4"	¾"	5"	1"	-	13	11	20
6"	11-1/4"	6-7/8"	12-1/2"	1-1/8"	5"	1"	-	35	28	58
8"	14"	8-1/2"	15-1/2"	1-3/8"	5"	1"	1-1/2"	63	49	107
10"	17"	10-3/4"	18-1/2"	1-3/4"	5"	1-1/2"	1-1/2"	117	89	200
12"	19-3/8"	12"	21"	2"	5"	1-1/2"	1-1/2"	172	127	290
14"	20-1/4"	14"	22"	2-1/4"	6"	1-1/2"	1-3/4"	212	150	350
16"	22-3/8"	16"	24-1/4"	2-1/2"	6"	1-1/2"	1-3/4"	286	196	468
18"	24-7/8"	18"	27"	2-7/8"	6"	1-1/2"	2	407	275	665

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: M-Smooth, F-Machined, S-Serrated
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank


LH Flex Flow Ltd.

Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

Drip Ring for Raised Face and Female Groove Type

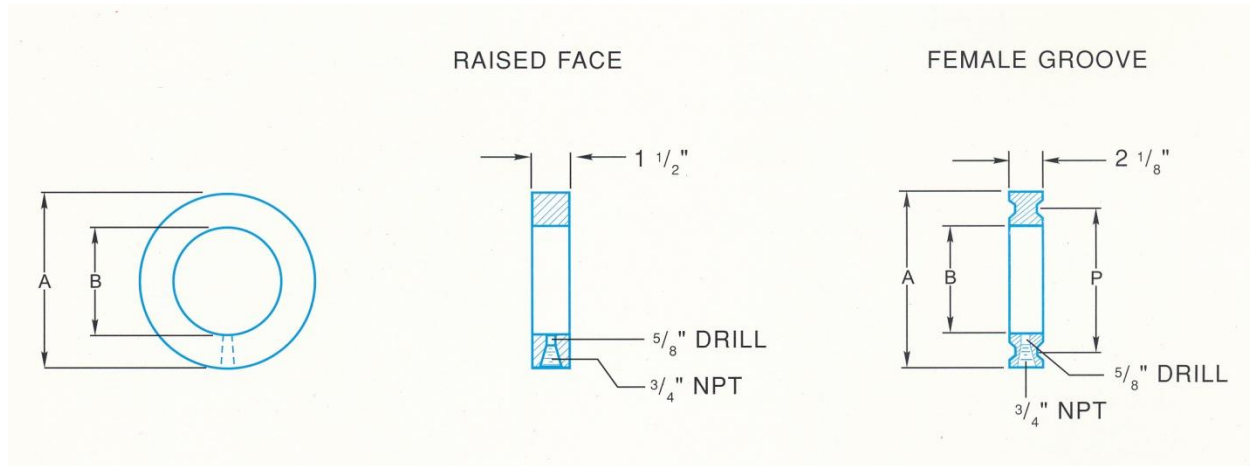

Size	Dim 'B'	Dim 'A'					Weight, lbs.				
		150#	300#	600#	900#	1500#	150#	300#	600#	900#	1500#
1"	1-1/8"	2-1/2"	2-3/4"	2-3/4"	3"	3	2	2	2	3	3
1-1/2"	1-5/8"	3-1/4"	3-5/8"	3-5/8"	3-3/4"	3-3/4"	3	3	3	4	4
2"	2-1/8"	4"	4-1/4"	4-1/4"	5-1/2"	5-1/2"	4	5	5	9	9
2-1/2"	2-1/2"	4-3/4"	5"	5"	6-3/8"	6-3/8"	5	6	6	11	11
3"	3-1/8"	5-1/4"	5-3/4"	5-3/4"	6-1/2"	6-3/4"	6	8	8	11	12
4"	4-1/8"	6-3/4"	7"	7-1/2"	8"	8-1/8"	9	11	13	16	16
6"	6-1/8"	8-5/8"	9-3/4"	10-3/8"	11-1/4"	11"	12	19	23	30	28
8"	8"	10-7/8"	12"	12-1/2"	14"	13-3/4"	18	27	31	44	42
10"	10-1/8"	13-1/4"	14-1/8"	15-5/8"	17"	17"	24	32	47	62	62
12"	12"	16"	16-1/2"	17-3/4"	19-3/8"	20-1/4"	37	43	57	77	89

LH Flex Flow Ltd.


Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

300# Ring Joint Flange Rating

Female Grove Type

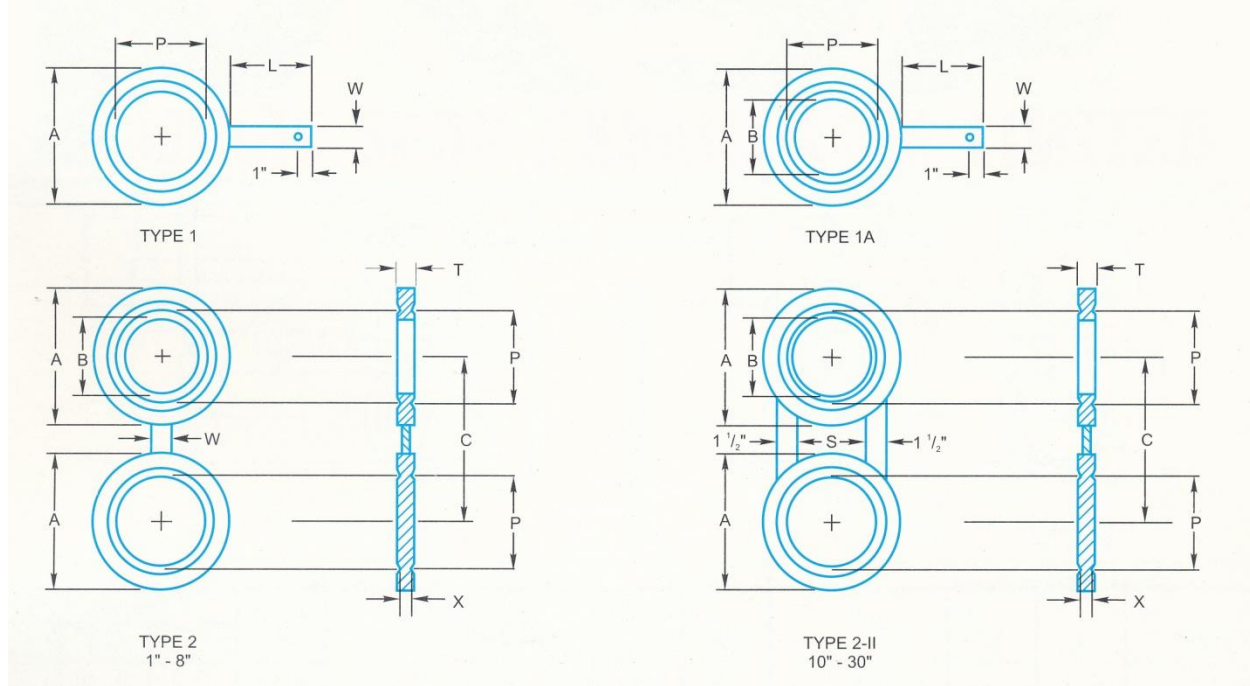

Size	A	B	C	T	X	L	W	S	P	Ring #	Weight in lbs.		
											1	1A	2
1"	2-3/4"	1-1/8"	3-1/2"	3/4"	3/4"	4"	1"	-	2"	R16	2	1	2
1-1/2"	3-9/16"	1-5/8"	4-1/2"	7/8"	3/8"	4"	1"	-	2-11/16"	R20	3	2	4
2"	4-1/4"	2-1/8"	5"	1-1/16"	7/16"	4"	1"	-	3-1/4"	R23	4	3	7
2-1/2"	5"	2-1/2"	5-7/8"	1-1/2"	1/2"	4"	1"	-	4"	R26	6	4	9
3"	5-3/4"	3-1/8"	6-5/8"	1-1/4"	5/8"	4"	1"	-	4-7/8"	R31	10	7	14
4"	6-7/8"	4-1/8"	7-7/8"	1-3/8"	3/4"	5"	1"	-	5-7/8"	R37	15	10	22
6"	9-1/2"	6-1/8"	10-5/8"	1-11/16"	1-1/16"	5"	1"	-	8-5/16"	R45	35	20	51
8"	11-7/8"	8"	13"	1-5/8"	1"	5"	1"	-	10-5/8"	R49	51	28	75
10"	14"	10-1/8"	15-1/4"	1-7/8"	1-1/4"	5"	1"	1-1/2"	12-3/4"	R53	82	40	117
12"	16-1/4"	12"	17-3/4"	2"	1-3/8"	6"	1-1/2"	1-1/2"	15"	R57	120	55	167
14"	18"	13-1/4"	20-1/4"	2-1/8"	1-1/2"	6"	1-1/2"	1-1/2"	16-1/2"	R61	155	70	220
16"	20"	15-1/4"	22-1/2"	2-5/16"	1-11/16"	6"	1-1/2"	1-1/2"	18-1/2"	R65	205	85	285
18"	22-5/8"	17-1/4"	24-3/4"	2-1/2"	1-7/8"	6"	1-1/2"	1-1/2"	21"	R69	285	120	400
20"	25"	19-1/4"	27"	2-13/16"	2-1/4"	7"	1-1/2"	1-1/2"	23"	R73	390	160	540
24"	29-1/2"	23-1/4"	32"	3-5/16"	2-7/16"	7"	1-1/2"	1-3/4"	27-1/4"	R77	635	240	870
30"	36-1/2"	29-1/4"	39-1/4"	4"	3"	7"	1-1/2"	2"	33-3/4"	R95	1150	390	1525

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: F-Machined
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank

LH Flex Flow Ltd.


Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

600# Ring Joint Flange Rating

Female Grove Type

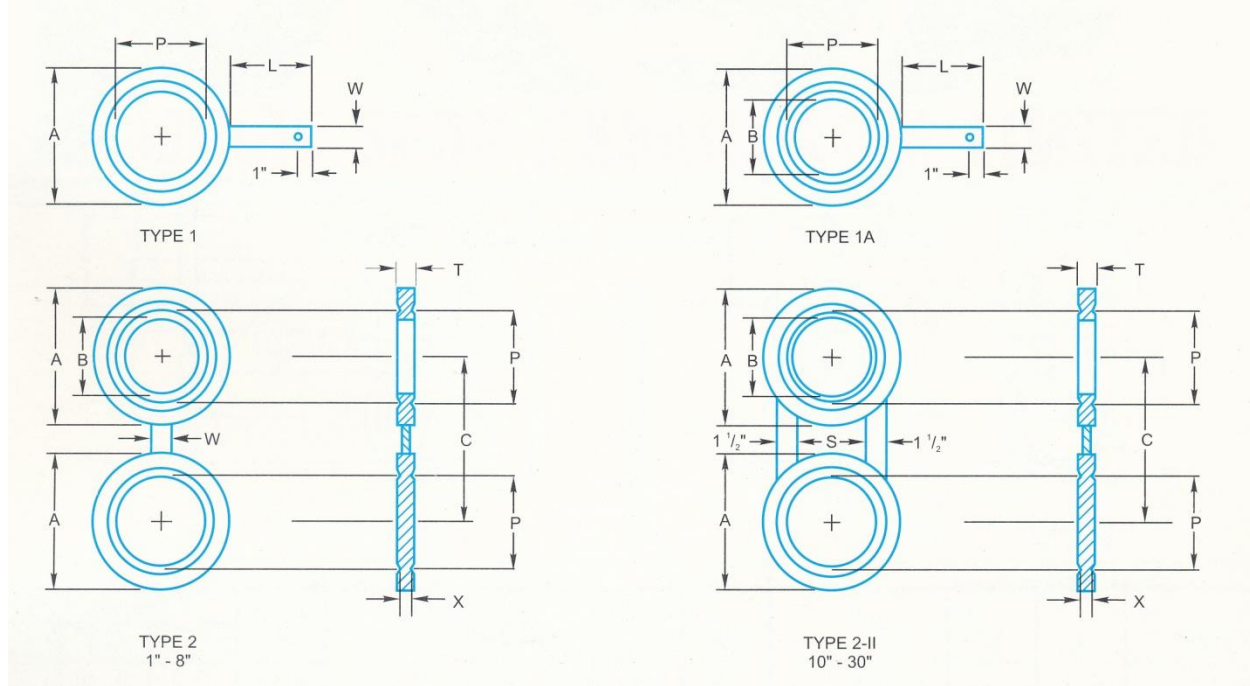

Size	A	B	C	T	X	L	W	S	P	Ring #	Weight in lbs.		
											1	1A	2
1"	2-3/4"	1-1/8"	3-1/2"	3/4"	3/4"	4"	1"	-	2"	R16	2	1	2
1-1/2"	3-9/16"	1-5/8"	4-1/2"	7/8"	3/8"	4"	1"	-	2-11/16"	R20	3	2	4
2"	4-1/4"	2-1/8"	5"	1-1/16"	7/16"	4"	1"	-	3-1/4"	R23	4	3	7
2-1/2"	5"	2-1/2"	5-7/8"	1-1/8"	1/2"	4"	1"	-	4"	R26	6	4	9
3"	5-3/4"	3-1/8"	6-5/8"	1-1/4"	5/8"	4"	1"	-	4-7/8"	R31	10	7	14
4"	6-7/8"	4-1/8"	8-1/2"	1-3/8"	3/4"	5"	1"	-	5-7/8"	R37	15	10	22
6"	9-1/2"	6-1/8"	11-1/2"	1-11/16"	1-1/16"	5"	1"	-	8-5/16"	R45	35	20	51
8"	11-7/8"	7-5/8"	13-3/4"	2"	1-3/8"	6"	1"	-	10-5/8"	R49	63	35	95
10"	14"	9-3/4"	17"	2-1/4"	1-5/8"	6"	1"	1-1/2"	12-3/4"	R53	100	47	140
12"	16-1/4"	10-1/2"	19-1/4"	2-1/2"	1-7/8"	6"	1-1/2"	1-1/2"	15"	R57	150	68	210
14"	18"	11-3/16"	20-3/4"	2-3/4"	2-1/8"	6"	1-1/2"	1-3/4"	16-1/2"	R61	200	91	285
16"	20"	12-13/16"	23-3/4"	3"	2-3/8"	7"	1-1/2"	1-3/4"	18-1/2"	R65	270	112	385
18"	22-5/8"	14-7/8"	25-3/4"	3-5/16"	2-11/16"	7"	1-1/2"	2"	21"	R69	380	160	545
20"	25"	17-7/16"	28-1/2"	3-11/16"	2-15/16"	7"	1-1/2"	2"	23"	R73	510	210	725
24"	29-1/2"	21-9/16"	33"	4-5/16"	3-7/16"	8"	1-1/2"	1-1/4"	27-1/4"	R77	830	315	1150

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: F-Machined
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank

LH Flex Flow Ltd.


Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

900# Ring Joint Flange Rating

Female Grove Type

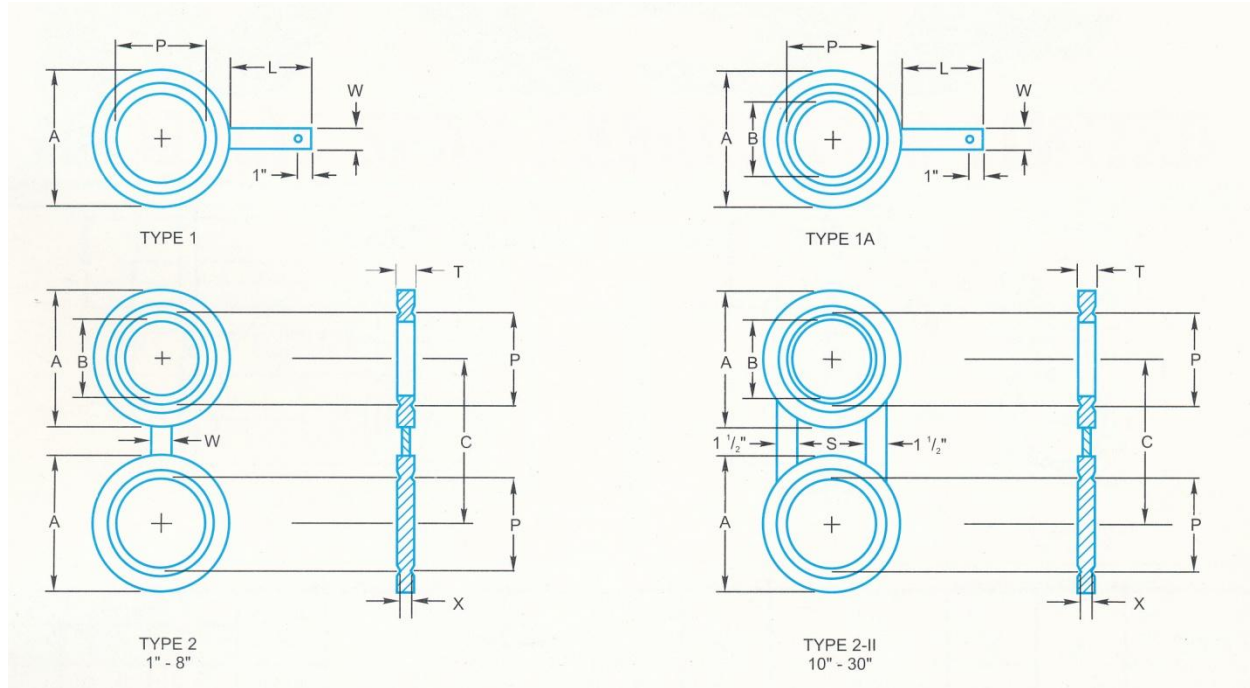

Size	A	B	C	T	X	L	W	S	P	Ring #	Weight in lbs.		
											1	1A	2
1"	2-13/16"	1"	4"	15/16"	7/16"	5"	1"	-	2"	R16	2	2	3
1-1/2"	3-5/8"	1-1/2"	4-7/8"	1-1/16"	9/16"	5"	1"	-	2-11/16"	R20	4	3	6
2"	4-7/8"	1-15/16"	6-1/2"	1-3/8"	3/4"	5"	1"	-	3-3/4"	R24	8	7	14
2-1/2"	5-3/8"	2-1/4"	7-1/2"	1-1/2"	7/8"	6"	1"	-	4-1/4"	R27	13	11	23
3"	6-1/8"	1-11/16"	7-1/2"	1-3/8"	3/4"	6"	1"	-	4-7/8"	R31	12	10	21
4"	7-1/8"	3-7/8"	9-1/4"	1-9/16"	15/16"	6"	1"	-	5-7/8"	R37	17	12	26
6"	9-1/2"	5-3/16"	12-1/2"	1-15/16"	1-5/16"	6"	1"	-	8-5/16"	R45	39	28	63
8"	12-1/8"	6-7/8"	15-1/2"	2-5/16"	1-11/16"	7"	1"	1-3/4"	10-5/8"	R49	76	52	124
10"	14-1/4"	8-1/2"	18-1/2"	2-5/8"	2	7"	1-1/2"	1-3/4"	12-3/4"	R53	118	76	188
12"	16-1/2"	10-1/8"	21	2-15/16"	2-3/16"	7"	1-1/2"	1-3/4"	15"	R57	180	113	286
14"	18-3/8"	11-3/16"	22	3-7/16"	2-9/16"	7"	1-1/2"	1-3/4"	16-1/2"	R62	255	158	403
16"	20-5/8"	12-13/16"	24-1/4"	3-3/4"	2-7/8"	7"	1-1/2"	2"	18-1/2"	R66	355	217	560
18"	23-3/8"	14-7/8"	27"	4-1/4"	3-1/4"	8"	1-1/2"	2-1/4"	21"	R70	515	305	805
20"	25-1/2"	16-1/16"	29-1/2"	4-5/8"	3-5/8"	10"	2"	2-1/2"	23"	R74	713	432	1115
24"	30-3/8"	19-5/16"	35-1/2"	5-1/2"	4-1/4"	10"	2"	2-3/4"	27-1/4"	R78	202	719	1861

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: F-Machined
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank

LH Flex Flow Ltd.


Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

1500# Ring Joint Flange Rating

Female Grove Type

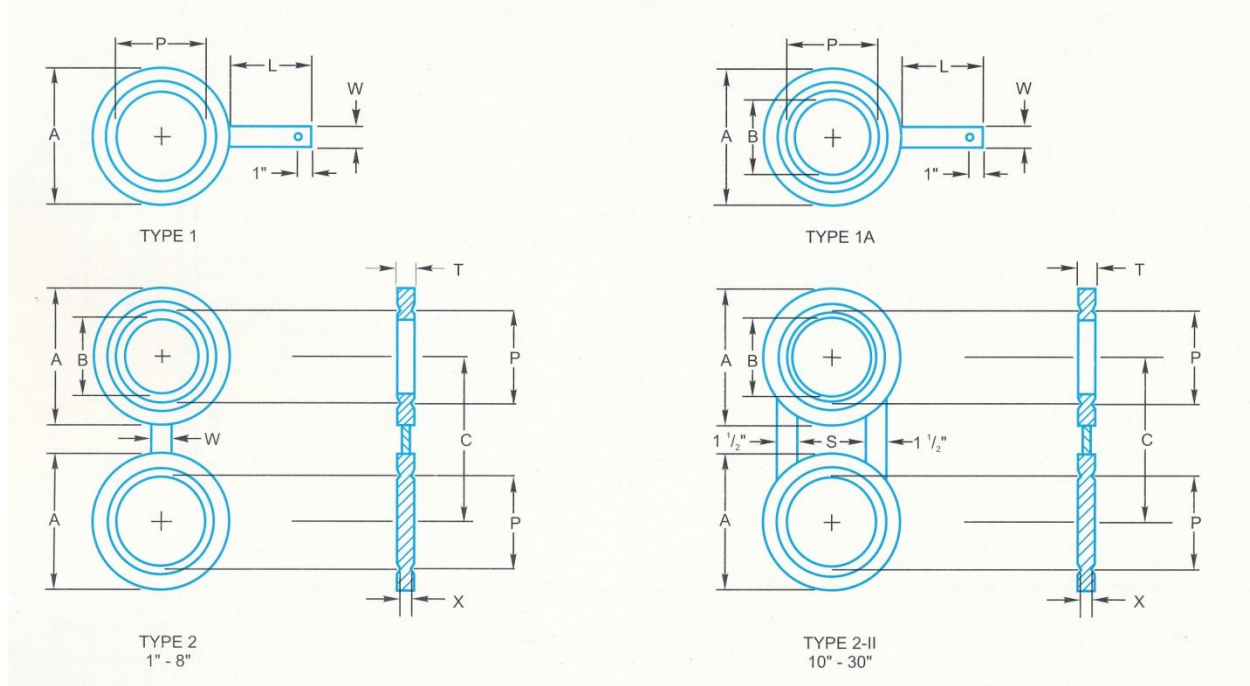

Size	A	B	C	T	X	L	W	S	P	Ring #	Weight in lbs.		
											1	1A	2
1"	2-13/16"	1"	4"	15/16"	7/16"	5"	1"	-	2"	R16	2	2	3
1-1/2"	3-5/8"	1-1/2"	4-7/8"	1-1/16"	9/16"	5"	1"	-	2-11/16"	R20	4	3	6
2"	4-7/8"	1-15/16"	6-1/2"	1-3/8"	3/4"	5"	1"	-	3-3/4"	R24	8	7	14
2-1/2"	5-3/8"	2-1/4"	7-1/2"	1-1/2"	7/8"	6"	1"	-	4-1/4"	R27	13	11	23
3"	6-5/8"	2-5/8"	8"	1-3/4"	1-1/8"	6"	1"	-	5-3/4"	R35	19	17	33
4"	7-5/8"	3-7/16"	9-1/2"	1-15/16"	1-5/16"	6"	1"	-	6-3/8"	R39	27	22	45
6"	9-3/4"	5-3/16"	12-1/2"	2-7/16"	1-7/16"	6"	1"	-	8-5/16"	R46	54	39	87
8"	12-1/2"	6-13/16"	15-1/2"	3"	2-1/8"	7"	1"	2"	10-5/8"	R50	107	75	174
10"	14-5/8"	8-1/2"	19"	3-7/16"	2-9/16"	8"	1-1/2"	2-1/4"	12-3/4"	R54	170	115	275
12"	17-1/4"	10-1/8"	22-1/2"	4-1/8"	3"	8"	1-1/2"	2-1/4"	15"	R58	275	180	443
14"	19-1/4"	11-3/16"	25"	4-5/16"	3-1/16"	9"	1-1/2"	2-1/2"	16-1/2"	R63	370	240	595
16"	21-1/2"	12-13/16"	27-3/4"	5-1/16"	3-11/16"	9"	1-1/2"	2-3/4"	18-1/2"	R67	515	325	822
18"	24-1/8"	14-7/8"	30-1/2"	5-9/16"	4-3/16"	10"	1-1/2"	3"	21"	R71	715	440	1133
20"	26-1/2"	16-1/16"	32-3/4"	5-15/16"	4-9/16"	10"	2"	3-1/4"	23"	R75	998	634	1602
24"	31-1/4"	19-5/16"	39"	6-15/16"	5-5/16"	11"	2"	3-1/2"	27-1/4"	R79	1620	1005	2565

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: F-Machined
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank

LH Flex Flow Ltd.


Bay 'F' 8616-44St. S.E. Calgary, Alberta, Canada T2C2P6

Phone: 403-265-4415

Fax: 403-265-4445

2500# Ring Joint Flange Rating

Female Grove Type

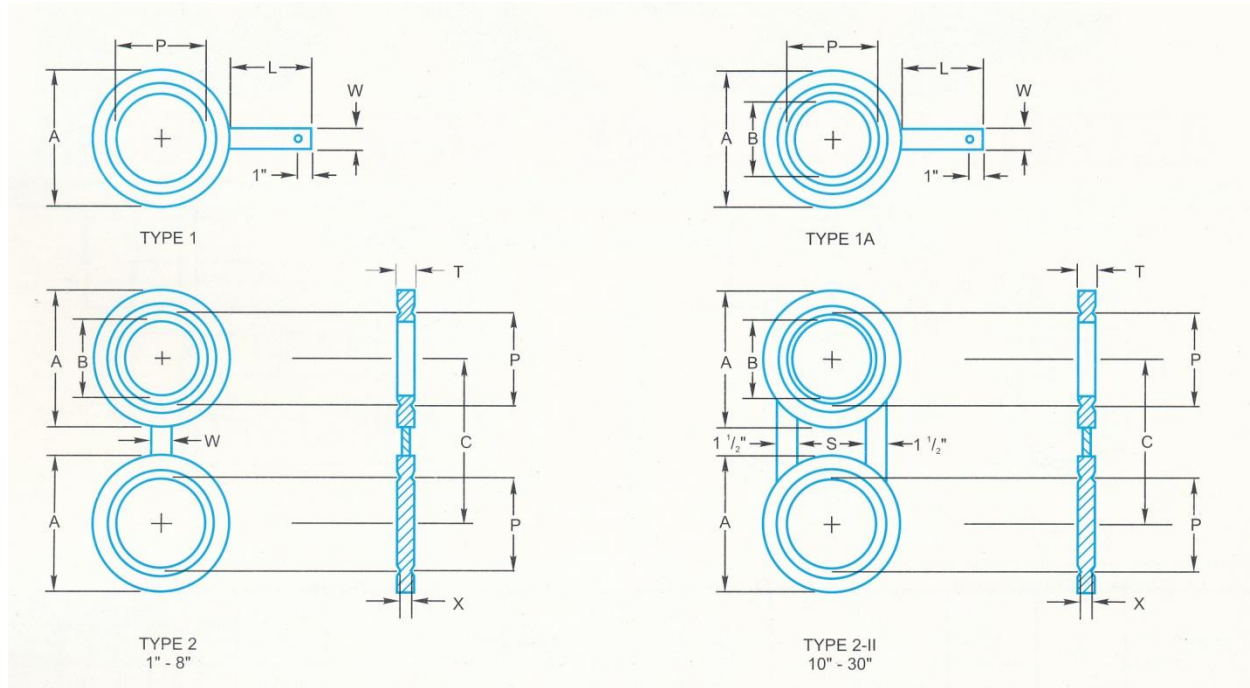

Size	A	B	C	T	X	L	W	S	P	Ring #	Weight in lbs.		
											1	1A	2
1"	3-1/4"	1"	4-1/4"	1-1/8"	5/8"	5"	1"	-	2-3/8"	R18	3	3	5
1-1/2"	4-1/2"	1-1/2"	5-3/4"	1-1/2"	7/8"	5"	1"	-	3-1/4"	R23	6	5	10
2"	5-1/4"	1-15/16"	6-3/4"	1-5/8"	1"	5"	1"	-	4"	R26	11	9	18
2-1/2"	5-7/8"	2-1/4"	7-3/4"	1-7/8"	1-1/8"	6"	1"	-	4-3/8"	R28	15	13	30
3"	6-5/8"	2-5/8"	9	2"	1-1/4"	6"	1"	-	5"	R32	21	18	45
4"	8"	3-7/16"	10-3/4"	2-1/2"	1-5/8"	6"	1"	-	6-3/8"	R38	38	31	64
6"	11"	5-3/16"	14-1/2"	4-1/4"	2-1/4"	6"	1"	-	9"	R47	93	72	160
8"	13-3/8"	6-13/16"	17-1/4"	3-7/8"	2-3/4"	7"	1"	2-1/4"	11"	R51	164	121	278
10"	16-3/4"	8-1/2"	21-1/4"	4-5/8"	3-1/4"	8"	1-1/2"	2-1/2"	13-1/2"	R55	308	229	527
12"	19-1/2"	10-1/8"	24-3/8"	5-1/4"	3-7/8"	8"	1-1/2"	2-1/2"	16"	R60	473	345	803

- Other rating and alloys also available
- Material: C- Carbon Steel, X- 304 SS, Y-316 SS, Z-other
- Finish: F-Machined
- Order by code type: 1-Paddle Blank, 1A-Paddle Spacer, 2-Figure 8 Blank