


1500 lb/sq. in.

Welding Neck Flanges

Vorschweißflansche

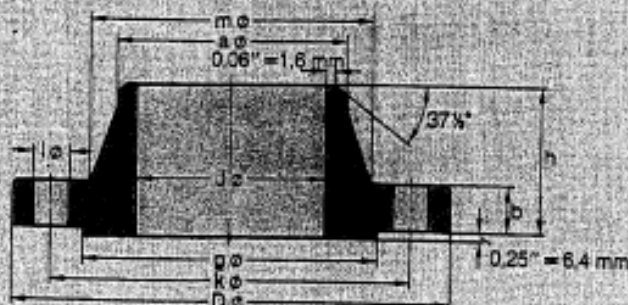

ANSI B 16.5

Pipe Rohr			Flange Flansch			Hub Ansatz		Raised Face Leiste	Drilling Template Schraubenlöcher			Approx. Weight Gewicht Pounds Kilo
Nom. Size DN	O D in. mm	D in. mm	J in. mm	b in. mm	h in. mm	a in. mm	m in. mm	g in. mm	Num- ber Anzahl	l in. mm	k in. mm	
1/2"	0.84 21.3	4.75 120.7	To be specified by purchaser Vom Besteller anzugeben	0.88 22.4	2.38 60.5	0.84 21.3	1.50 38.1	1.38 35.1	4	0.88 22.4	3.25 82.6	4.1 1.87
3/4"	1.05 26.7	5.12 130.0		1.00 25.4	2.75 69.9	1.05 26.7	1.75 44.5	1.69 42.9	4	0.88 22.4	3.50 88.9	5.6 2.56
1"	1.315 33.4	5.88 149.4		1.12 28.4	2.88 73.2	1.315 33.4	2.06 52.3	2.00 50.8	4	1.00 25.4	4.00 101.6	8.2 3.74
1 1/4"	1.66 42.2	6.25 158.8		1.12 28.4	2.88 73.2	1.66 42.2	2.50 63.5	2.50 63.5	4	1.00 25.4	4.38 111.3	9.5 4.33
1 1/2"	1.90 48.3	7.00 177.8		1.25 31.8	3.25 82.6	1.90 48.3	2.75 69.9	2.88 73.2	4	1.12 28.4	4.88 124	13.1 5.94
2"	2.375 60.3	8.50 215.9		1.50 38.1	4.00 101.6	2.375 60.3	4.12 104.6	3.62 91.9	8	1.00 25.4	6.50 165.1	23.8 10.8
2 1/2"	2.875 73.0	9.62 244.3		1.62 41.1	4.12 104.6	2.875 73.0	4.88 124	4.12 104.6	8	1.12 28.4	7.50 190.5	33.0 15.0
3"	3.50 88.9	10.50 266.7		1.88 47.8	4.62 117.3	3.50 88.9	5.25 133.4	5.00 127.0	8	1.25 31.8	8.00 203.2	43.8 19.9
4"	4.50 114.3	12.25 311.2		2.12 53.8	4.88 124	4.50 114.3	6.38 162.1	6.19 157.2	8	1.38 35.1	9.50 241.3	65.9 29.9
5"	5.563 141.3	14.75 374.7		2.88 73.2	6.12 155.4	5.563 141.3	7.75 196.9	7.31 185.7	8	1.62 41.1	11.50 292.1	122 55.4
6"	6.625 168.3	15.50 393.7		3.25 82.6	6.75 171.5	6.625 168.3	9.00 228.6	8.50 215.9	12	1.50 38.1	12.50 317.5	151 68.4
8"	8.625 219.1	19.00 482.6		3.62 91.9	8.38 212.9	8.625 219.1	11.50 292.1	10.62 269.7	12	1.75 44.5	15.50 393.7	256 117
10"	10.75 273	23.00 584.2		4.25 108.0	10.00 254.0	10.75 273	14.50 368.3	12.75 323.9	12	2.00 50.8	19.00 482.6	427 194
12"	12.75 323.8	26.50 673.1		4.88 124	11.12 282.4	12.75 323.8	17.75 450.9	15.00 381.0	16	2.12 53.8	22.50 571.5	634 288
14"	14.0 355.6	29.50 749.3		5.25 133.4	11.75 298.5	14.0 355.6	19.50 495.3	16.25 412.8	16	2.38 60.5	25.00 635.0	837 380
16"	16.0 406.4	32.50 825.5		5.75 146.1	12.25 311.2	16.0 406.4	21.75 552.5	18.50 469.9	16	2.62 66.5	27.75 704.9	1068 485
18"	18.0 457.2	36.00 914.4		6.38 162.1	12.88 327.2	18.0 457.2	23.50 596.9	21.00 533.4	16	2.88 73.2	30.50 774.7	1419 644
20"	20.0 508	38.75 984.3		7.00 177.8	14.00 355.6	20.0 508	25.25 641.4	23.00 584.2	16	3.12 79.2	32.75 831.9	1707 775
24"	24.0 609.6	46.00 1168.4		8.00 203.2	16.00 406.4	24.0 609.6	30.00 762.0	27.25 692.2	16	3.62 91.9	39.00 990.6	2714 1232